

Active Bed Support

Uniform spheres of activated alumina

BASF Active Bed Supports (ABS) are uniform spheres of activated alumina produced by BASF's unique manufacturing process. Their primary use is for top and bottom bed support in adsorption units. The product can also be used in catalytic applications where activated alumina is beneficial to the process.

Product Applications

Activated alumina is a very porous form of aluminum oxide of high surface area which adsorbs contaminants from liquids and gases. ABS are used to enhance alumina performance in adsorption applications. ABS used on the inlet portion of the bed helps minimize contamination from carryover of amines, liquid (entrained) water, compressor oils, high MW hydrocarbons, salts, etc., onto the adsorbent bed.

High crush strength becomes significant when used at the bottom of large towers. Adsorbent beds are usually supported at the bottom with 3"-12" depth of bed support. High crush strength support material is used to prevent migration of adsorbent and/or adsorbent fines from the vessel. A minimum of 3"-6" is also recommended on the top of the adsorbent to serve as a gas flow distributor.

The high surface area of BASF active bed supports yields high utilization of the alumina for contaminant removal. Acting as an adsorbent, increased unit capacity allows longer cycle time, fewer regeneration and longer inventory life. BASF active bed supports have very low silica content, which minimizes unwanted side reactions.

Available Sizes

- 1/8"
- 1/4"
- 3/8"
- 1/2"

Available Packaging

- 2000 lb (907 kg) super sacks
- 350 lb (159 kg) steel drums

Physical Properties	1/2" (12.7mm)	3/8" (9.5mm)	1/4" (6.4mm)	1/8" (3.2mm)
Surface Area, m ² /g	280	300	320	340
Total Pore Volume, cc/g	0.5	0.5	0.5	0.5
Abrasion Loss, wt %	0.15	0.10	0.10	0.10
Bulk Density, lbs/ft ³ (kg/m ³)	40-50 (641-801)			
Crush Strength, lbs (kg)	150 (68)	100 (45)	70 (32)	30 (14)
Al ₂ O ₃ (volatile free), wt %	>99 %	>99 %	>99 %	>99 %
Alumina XRD phase	Amorphous, chi and gamma			

*These indicative properties do not represent process capabilities nor specifications.

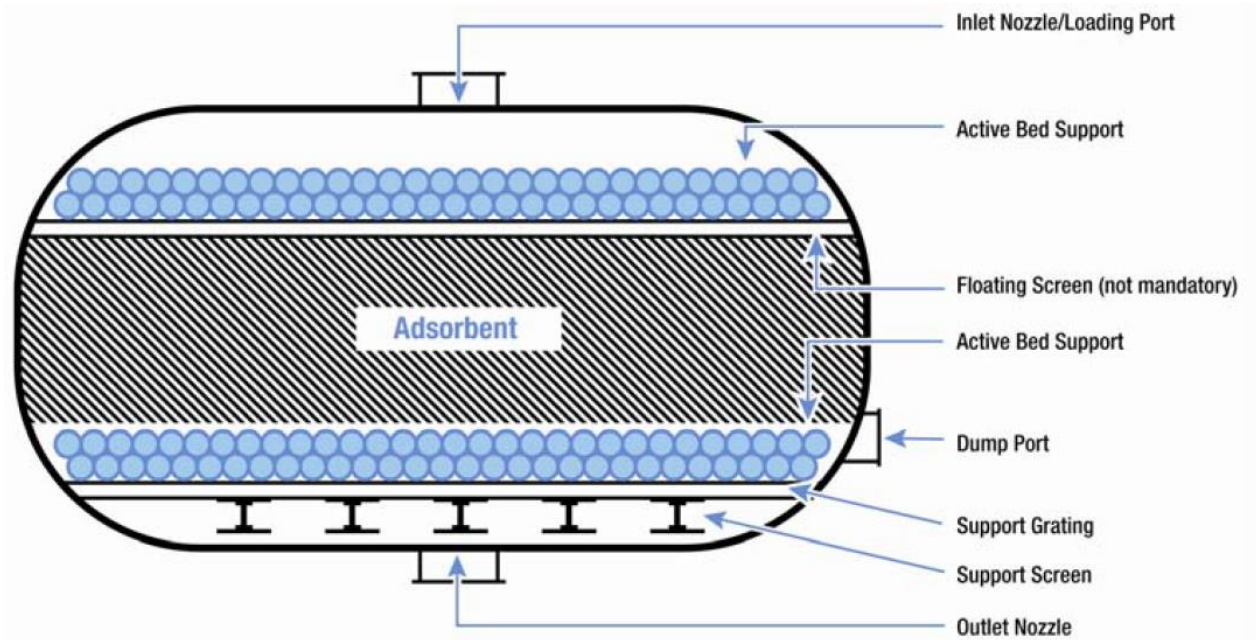


Figure 1. Bed drawing with location of ABS indicated at top and bottom of bed.

About Us

BASF's Catalysts division is the world's leading supplier of environmental and process catalysts. The group offers exceptional expertise in the development of technologies that protect the air we breathe, produce the fuels that power our world and ensure efficient production of a wide variety of chemicals, plastics and other products, including advanced battery materials. By leveraging our industry-leading R&D platforms, passion for innovation and deep knowledge of precious and base metals, BASF's Catalysts division develops unique, proprietary solutions that drive customer success.

BASF - We create chemistry

Americas

BASF Corporation
25 Middlesex/Essex Turnpike
Iselin, New Jersey, 08830, USA
Tel : +1-732-205-5000
Fax: +1-732-205-7725
Email: catalysts-america@basf.com

Asia Pacific

BASF (China) Company Limited
300 Jiang Xin Sha Road,
Pudong, Shanghai 200137
P.R. China
Tel: +86-21-2039 2549
Fax: +86-21-2039 4800-2549
Email: catalysts-asia@basf.com

Europe, Middle East, Africa

BASF De Meern BV Catalysts
The Netherlands
Tel: +31-30-666 9437
Email: catalysts-europe@basf.com

All data represents typical product properties and are based upon BASF standard test methods. All test methods are available upon request.

Although all statements and information in this publication are believed to be accurate and reliable, they are presented gratis and for guidance only, and risks and liability for results obtained by use of the products or application of the suggestions described are assumed by the user. NO WARRANTIES OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE MADE REGARDING PRODUCTS DESCRIBED OR DESIGNS, DATA OR INFORMATION SET FORTH. Statements or suggestions concerning possible use of the products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should not assume that toxicity data and safety measures are indicated or that other measures may not be required. © 2015 BASF